

Roof cowlings




Roof cowling, type DOS/AL

Dimensions	2
Specifications	3
Mounting examples	4
Options	5

Type DOS/AI


- 1 Curb
- 2 Isolation (option)

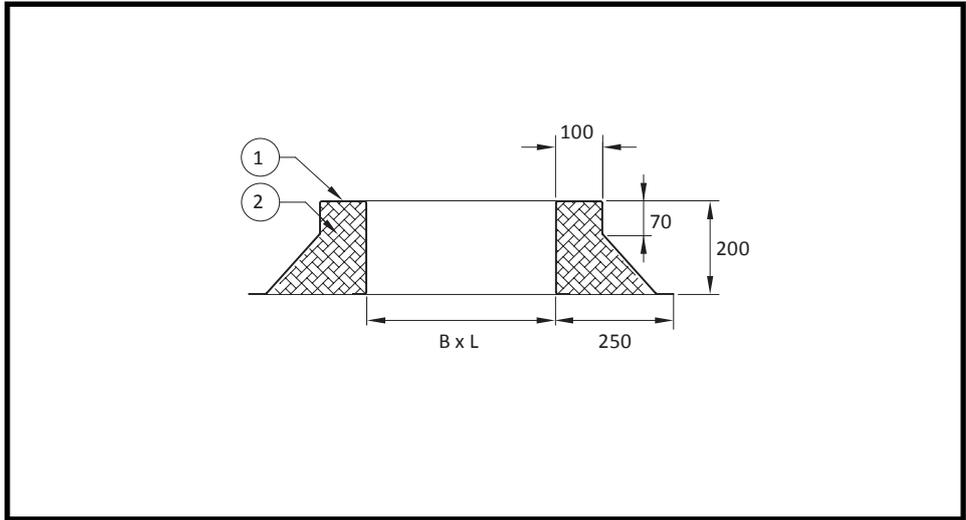


Specifications curbs

Application	To be placed on a roof recess for installation of roof cowl, ventilator etc.	
Advantages	Roof cowls, manufacturer Smitsair fit directly fit on these curbs. Because the curbs are double-walled, they can alternatively be isolated internally.	
Dimensions	Technically all dimensions are possible	
Version	Double-walled curb	
Material	Aluminium quality EN AW-5754 H12/H22. Isolation : Glass wool (option)	
Different material	<ul style="list-style-type: none"> • Sendzimir galvanised sheet steel, quality DX51D Z275-MA • Stainless steel, AISI-304, active ingredient no. 1.4301 • Stainless steel, AISI-316, active ingredient no. 1.4401 	
Mounting	To be pasted in bitumen	
Details	Possible implementation	<ul style="list-style-type: none"> • Suitable for pitched roof • Suitable for pitched tiled roof. The curb is then provided with a lead sheet. • Different height measurement. • The top of the curb includes a walking platform from galvanised steel. Alternatively with a plenum for air exhaust.
Order example	Please state the following information in your order:	
		1
	Type	DOS/AL
	Dimensions	600 x 800 x 200 mm (l x b x h)
	Details	walking platform included
	Shipping address	Incl. postal code and contact person


Mounting examples

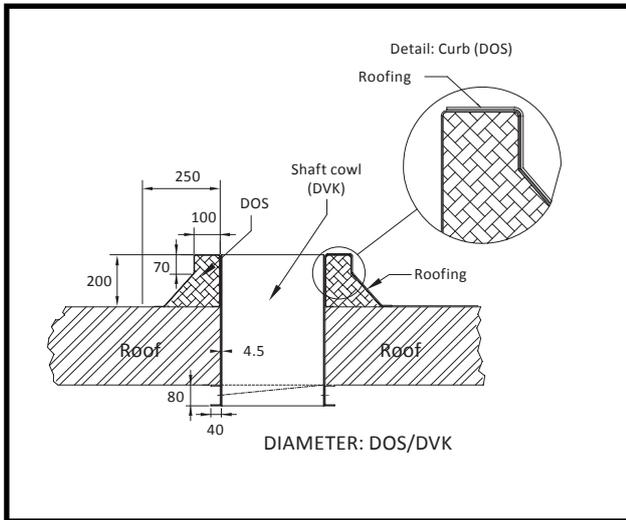

Picture 1: Pasted in flat roof.

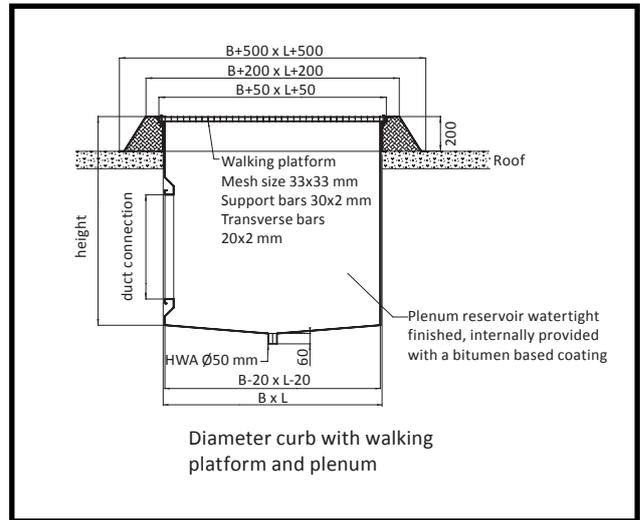

Picture 3: DOS + walking platform + plenum.

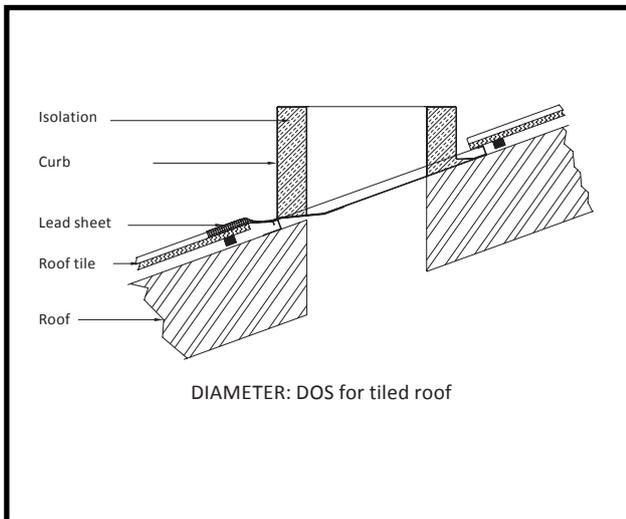

Picture 2: Pitched tiled roof

Options

Combination examples

The curbs can be combined with the following products

- Curbs, manufacturer Smitsair