

Roof cowlings




Roof cowl, type DOS/AL

Dimensions	2
Specifications	3
Mounting examples	4
Options	5

Type DOS/AI


- 1 Curb
- 2 Isolation (option)

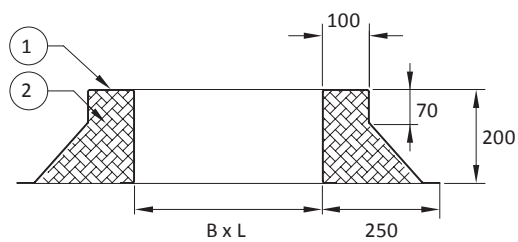


Specifications curbs

Application	To be placed on a roof recess for installation of roof cowl, ventilator etc.		
Advantages	Roof cowls, manufacturer Smitsair fit directly fit on these curbs. Because the curbs are double-walled, they can alternatively be isolated internally.		
Dimensions	Technically all dimensions are possible		
Version	Double-walled curb		
Material	Aluminium quality EN AW-5754 H12/H22. Isolation : Glass wool (option)		
Different material	- Sendzimir galvanised sheet steel, quality DX51D Z275-MA - Stainless steel, AISI-316, active ingredient no. 1.4401		
Mounting	To be pasted in bitumen		
Details	Possible implementation	- Suitable for pitched roof - Suitable for pitched tiled roof. The curb is then provided with a lead sheet. - Different height measurement. - The top of the curb includes a walking platform from galvanised steel. Alternatively with a plenum for air exhaust.	
Order example	Please state the following information in your order:		
		1	
	Type	DOS/AL	
	Dimensions	600 x 800 x 200 mm (l x b x h)	
	Details	walking platform included	
	Shipping address	Incl. postal code and contact person	

Mounting examples

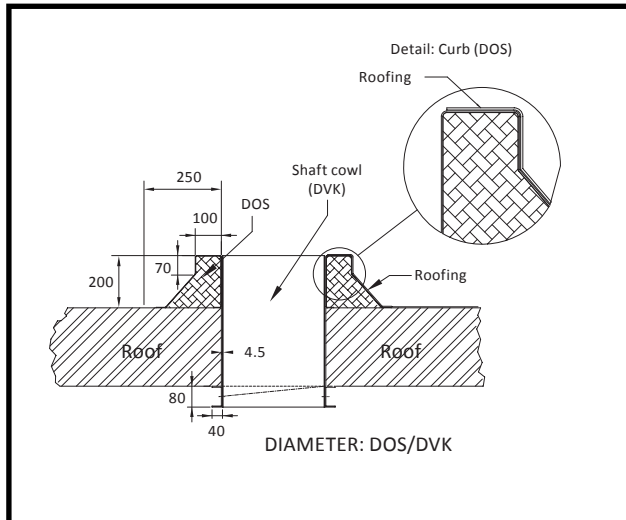

Picture 1: Pasted in flat roof.

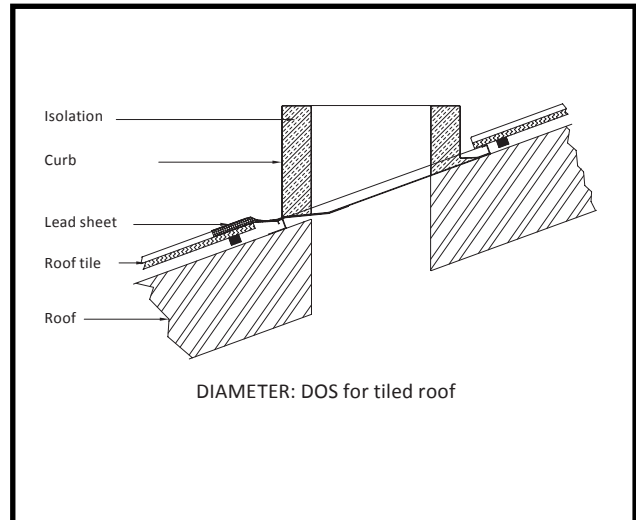

Picture 2: Pitched tiled roof

Options

Combination examples

The curbs can be combined with the following products

- Curbs, manufacturer Smitsair